

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.

P19026

Total Pages

Inventor(s) or Application Identifier: Rudolf MÜNCH

Title: SYSTEM AND METHOD FOR DETERMINING FIBER ORIENTATION IN FIBROUS MATERIAL WEBS

ADDRESS TO:

Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

APPLICATION ELEMENTS

ACCOMPANYING APPLICATION PARTS

1. ☒ Fee Transmittal Form
(Submit an original, and a duplicate for fee processing)
2. ☒ Specification [Total Pages 28]
(preferred arrangement set forth below)
 - Descriptive title of the Invention
 - Cross References to Related Applications
 - Statement Regarding Fed sponsored R & D
 - Reference to Microfiche Appendix
 - Background of the Invention
 - Brief Summary of the Invention
 - Brief Description of the Drawings (if filed)
 - Detailed Description
 - Claim(s)
 - Abstract of the Disclosure
3. ☒ Drawing(s) (35 USC 113) [Total Sheets 4]
4. ☒ Oath or Declaration [Total Pages 3]
☐ Newly executed (original or copy) ☒ Unexecuted
☐ Copy from a prior application (37 CFR 1.63(d))
 (for continuation/divisional with Box 18 completed)
 [Note Box 5 below]
 i. ☐ DELETION OF INVENTOR(S)
 Signed statement attached deleting inventor(s)
 named in the prior application, see 37 CFR 1.63(d)(2)
 and 1.33(b).
5. ☐ Incorporation By Reference (useable if Box 4b is checked)
 The entire disclosure of the prior application, from which a copy
 of the oath or declaration is supplied under Box 4b, is considered
 as being part of the disclosure of the accompanying application
 and is hereby incorporated by reference therein.
6. ☐ Microfiche Computer Program (Appendix)
7. ☐ Nucleotide and/or Amino Acid Sequence Submission
 (if applicable, all necessary)
 a. ☐ Computer Readable Copy
 b. ☐ Paper Copy (identical to computer copy)
 c. ☐ Statement verifying identity of above copies

8. ☐ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(b) Statement (when there is an assignee) ☐ Power of Attorney
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503)
 (Should be specifically itemized)
14. ☐ Small Entity Statement(s) ☐ Statement filed in prior application,
 Status still proper and desired
15. ☐ The prior application is assigned of record to _____
16. ☐ Foreign priority claimed
 a. ☐ Claim of Priority
 b. ☐ Certified Copy of Priority Document(s)
17. ☒ Other: Cover letter Under 37 CFR 1.53(b) and 1.53(f)

18. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior Application No. _____/_____, filed _____.
19. ☐ Amend the specification by inserting before the first line the sentence:

This application is a ___ continuation-in-part, ___ continuation, ___ division, of Application No. _____/_____, filed _____.

Address all future correspondence to Customer No. 7055 at the present address of:

GREENBLUM & BERNSTEIN, P.L.C.
1941 Roland Clarke Place
Reston, VA 20191
(703) 716-1191

Date

Neil F. Greenblum, Reg. No. 28,394

Signature

Typed or Printed Name

P19026.P03

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant : Rudolf MÜNCH

Serial No : Not Yet Assigned

Filed : Concurrently Herewith

For : SYSTEM AND METHOD FOR DETERMINING FIBER ORIENTATION IN
FIBROUS MATERIAL WEBS

COVER LETTER ACCOMPANYING U.S. PATENT APPLICATION
FILED UNDER 37 C.F.R. 1.53(b)and 1.53(f)

Commissioner of Patents and Trademarks
Washington, D.C. 20231

Sir:

Enclosed is a new patent application for filing in the U.S. Patent and Trademark Office under 37 C.F.R. 1.53(b)and 1.53(f) in which the Declaration and Power of Attorney attached thereto are in unexecuted form. An executed Declaration and Power of Attorney will be filed within the time period set forth in the Notice to File Missing Parts of Application, unless such time period has been extended by the filing of a petition accompanied by the extension fee under the provisions of 37 C.F.R. 1.136(a).

Related to this, a correspondence address is provided in the unexecuted Declaration and Power of Attorney, and is as follows:


GREENBLUM & BERNSTEIN, P.L.C.
1941 Roland Clarke Place
Reston, Va. 20191

The above-identified application includes:

- 27 pages of specification (including Abstract);
- 55 total claims; with 2 independent;
- 4 sheets of drawings with 10 figures;
- an unexecuted Declaration and Power of Attorney.

If there are any questions, please contact the undersigned at the below-listed telephone number.

Respectfully submitted,
Rudolf MÜNCH

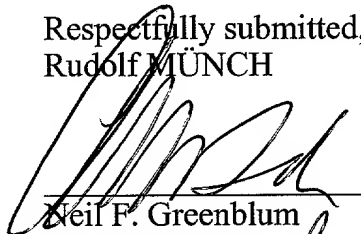
Neil F. Greenblum
Reg. No. 28,394 *Reg. No. 33,094*

March 24, 2000
GREENBLUM & BERNSTEIN, P.L.C.
1941 Roland Clarke Place
Reston, Va. 20191
(703) 716-1191

TITLE OF THE INVENTION

**SYSTEM AND METHOD FOR DETERMINING FIBER ORIENTATION
IN FIBROUS MATERIAL WEBS**

INVENTOR

Rudolf MÜNCH

P19026.S03

**SYSTEM AND METHOD FOR DETERMINING FIBER ORIENTATION
IN FIBROUS MATERIAL WEBS**

CROSS-REFERENCE TO RELATED APPLICATIONS

The present application claims priority under 35 U.S.C. § 119 of German
5 Patent Application No. 199 13 924.5, filed on March 26, 1999, the disclosure of
which is expressly incorporated by reference herein in its entirety.

BACKGROUND OF THE INVENTION

1. **Field of the Invention**

The invention relates to a system and a method for determining the orientation
10 of fibers in fibrous material webs, particularly paper webs.

2. **Discussion of Background Information**

The article "High-Resolution Fibre Orientation and Basis Weight
Measurement" by B. Drouin et al. in the *Journal of Pulp and Paper Science*, Vol. 22,
No. 7, July 7, 1996 mentions an instrument with which the fiber orientation in paper
15 is measured by a transmission measurement with a rotating plane of polarization. The
instrument is based on filtered black body radiation in the far infrared region (FIR)
of the electromagnetic spectrum. Some disadvantages of this conventional device are
its high cost and the fact that it works with only one wavelength.

SUMMARY OF THE INVENTION

20 The invention provides for a system and a method of the type initially
described, in which the fiber orientation can be determined more efficiently and with
high precision.

The invention utilizes at least one source of electromagnetic radiation disposed on one side of a fibrous material web and at least one sensor for receiving the radiation emitted by the source disposed on the other side. The radiation from the source penetrates the fibrous material from one side and is sensed on the other side. Moreover, at least one optical device, for influencing the propagation of the radiation as a function of its polarization properties, can be positioned in the path of the radiation, e.g., between the source and the sensor.

It has been discovered that the interaction between electromagnetic radiation and fibrous material webs having a homogeneous or at least dominant or prevalent fiber orientation, can be used to obtain information from which the fiber orientation can be determined. In principle, any desired wavelengths of the radiation can be used. However, wavelengths in the realm of visible light and/or infrared radiation are preferred. Moreover, NIR (Near Infrared Radiation) is most preferred. Additionally, other wavelengths may be utilized or required at the same time so that the system can cope with the differing ash content and/or other variations of the paper properties.

The optical system of the invention utilizes radiation whose propagation has been influenced to produce linearly polarized radiation. The invention may use completely unpolarized radiation from various sources, such as a natural light source, partially unpolarized light, or unpolarized radiation. This radiation which is emitted from the source can then be linearly polarized prior to entering and/or interaction with the fibrous material web. In this case, the optical system then serves as a polarizer.

Alternatively, the radiation which is emitted from the source can then be linearly polarized after passing through and/or interaction with the fibrous material web. In this case, the optical system is used as an analyzer. Such a design allows the direction of polarization of linearly polarized radiation to be detected after the radiation has passed through the fibrous material web.

The invention takes advantage of the fact that the propagation of linearly polarized radiation is influenced to the extent that the intensity of the linearly polarized radiation, that the optical device permits to pass, is a function of its direction of polarization.

5 In at least one embodiment of the invention, the optical system includes at least one polarizing filter. With filters of this type, it is possible both to produce linearly polarized radiation and to determine the polarization direction of linearly polarized radiation. Moreover, the use of such a polarizing filter permits the implementation of many different arrangements, all of which are characterized by comparatively
10 simple construction in terms of measurement technology as well as a high degree of measuring precision.

Thus, it is possible to arrange a system having a single optical device in the form of a polarizing filter located between the source and the fibrous material web. The invention provides for the intensity of the linearly polarized radiation, which is
15 produced by the polarizing filter and penetrates the fibrous material web, to be measured by sensor changes as a function of the orientation of the polarizing filter relative to the orientation of the fibers in the fibrous material web. Utilizing this technique, the fiber orientation can be determined in a comparatively simple manner by utilizing repeated measurements of intensity at different orientations of the
20 polarizing filter relative to the fibrous material web. Such a system design can utilize a polarizing filter which is mounted such that it can rotate about an axis running perpendicular to the fibrous material web running direction.

The system functions as follows: It is assumed that a measured light intensity depends on the main fiber orientation in the paper and on the orientation of the
25 polarization filters. The measured light intensity will be highest if the polarization filter and the fibers are oriented in the same direction (at 0° and 180°). The measured

light intensity will be lowest in the orthogonal directions (at 90° and 270°). It is further assumed that the intensity distribution in polar coordinates has therefore about an elliptical shape: the largest diameter at 0° (a), and the smallest diameter at 180° (b).

5 If the difference a-b is high, the fibers are very strongly oriented only in one direction. However, if the difference is small, there is only a very small orientation or an almost equal distribution of the fibers.

10 Accordingly, if the highest signal is attained, when the orientation of the polarization filter corresponds exactly to machine direction of the paper, the fiber orientation is 0° relative to the machine direction. Otherwise, the fibers are not oriented properly in the machine direction. Acceptable or desired values are between approximately -2° and approximately $+2^\circ$, while unacceptable or undesired values are larger than approximately 10° .

15 Thus, an algorithm may be utilized which has two parts: the data of the ellipse, and the relationship or how this data relates to paper properties. Accordingly, in order to calculate the orientation/shape of the ellipse, at least (3) three measurements have to be taken (three signals with polarizing filters in three different orientations). This can be performed using the usual quadratic equations which use the known properties of the ellipses.

20 In order to relate these data to the paper properties, empirical solutions are required. The signals a and b (and/or algorithmical combinations of these signals like a-b, a+b, and a/b), and the orientation angle of the ellipses are compared to lab tests. Thus, one can use e.g., Least Squares methods like "Partial Least Squares" (or other similar methods) in order to derive formulas to derive paper properties from the characteristics of the ellipse.

25 On the other hand, breaking load ellipses are something similar. Sample paper strips are typically taken having three different angles relative to the machine

direction (i.e., -30° , 30° , and 0°). From these three measurement values, an ellipse is calculated. Accordingly, the ellipse reflects the strength properties of the paper. The strength is greatest in the direction of the main fiber orientation and lowest in a direction orthogonal to it. Thus, the strength properties in different angles serve as an indication of the fiber orientation. Unfortunately, this technique cannot be performed on line as it requires that the paper samples or sections be removed or cut from the web.

Accordingly, the system may utilize several fixed polarizing filters which have defined orientations or polarization directions when in the measurement position instead of one or more movable polarizing filters. This design allows the filters to be exchanged quickly. Moreover, the filters may be arranged in a configuration known as a filter wheel.

According to another variant of the invention, a single polarizing filter is positioned between the fibrous material web and the sensor with the source being located on the other side of the fibrous material web. This design or arrangement exploits the capability of a fibrous material web having an at least dominant or prevalent fiber orientation to linearly polarize incident radiation, at least to a small degree, by interacting with the incident radiation. The polarization direction dependent on the fiber orientation can be detected with the polarizing filter, which serves as an analyzer in this arrangement. In this arrangement, the fiber orientation can be detected by measuring the intensity of the radiation which is permitted to pass through the polarizing filter as a function of the orientation of the polarizing filter relative to the fibrous material web.

In yet another variant of the invention, at least one polarizing filter is utilized on each side the fibrous material web. In this arrangement, one polarizing filter located between the source and the web. This filter produces linearly polarized

radiation from source radiation. Another filter is located between the web and a sensor device. This filter is used to detect the direction of polarization. In this arrangement, either of the two polarizing filters or both can be mounted such that they can rotate about an axis running perpendicular to a plane defined by the fibrous web running direction.

In another embodiment of the invention, a single polarizing filter is positioned between the source and one side of the fibrous material web. A plurality of polarizing filters are located on the other side of the fibrous material web. This arrangement also utilizes a sensor associated with each of these polarizing filters. Moreover, these filters can have different polarizing orientations relative to the fibrous material web travel direction. Additionally, in this design, because of the different orientations of the polarizing filters on the sensor side, none of the optical devices need be mounted so as to rotated relative to the fibrous material web. This is because two or more measurements can be performed at different relative orientations between the fibrous material web. Such a design allows for the detection of the fiber orientation.

In many of the embodiments, it is preferred that the source side polarizing filter be oriented such that the polarization direction of the linearly polarized radiation produced runs which are parallel to the travel or running direction of the fibrous material web. The sensor side polarizing filters can be either rotatably mounted so that they rotated opposite to one another. Alternatively, these sensor side filters can be non-rotatably mounted and oriented in a symmetrical manner relative to the web travel direction. Thus, for example, two sensor side filters can be provided, each of which has a sensor associated with it, which can rotated in opposite directions, for example, by approximately 30° or 45° relative to the web travel direction. The advantage of this arrangement is that there are minimal moving parts, which thereby avoids wear problems.

In general, it is possible to detect the fiber orientation with radiation of a single wavelength using the invention. However, since the interaction between the fibrous material web and the radiation is a function not only of the fiber orientation itself and additional factors such as the fiber length, fiber type and additional constituents and properties of the fibrous material web, but also of the wavelength of the radiation used for the measurement, more meaningful results can be obtained using several different wavelengths.

The invention also contemplates the use of individual radiation sources, each of which emits radiation at a specific wavelength, to be activated one after the other. In this case, a sensor of comparatively simple design, for example, a photodiode, can be used. This sensor would provide a signal representing the intensity thereof for each incident radiation.

On the other hand, it is preferred that a source which emits a discrete and/or continuous wavelength spectrum be used. This design makes it is possible to work simultaneously with different wavelengths. In this case, a sensor serving as a spectrometer can be used. The sensor is capable of detecting the intensity of the incident radiation separately by wavelength in order thus to be able to evaluate the signals separately by wavelength.

Moreover, the invention also provides that at least one source of electromagnetic radiation is arranged on one side of the fibrous material web. On the other side of the web is disposed at least one sensor for sensing the radiation emitted by the source and penetrating the fibrous material web. A polarizing filter is positioned between the source and the sensor device for influencing the propagation of the radiation as a function of its polarization characteristics. This filter may be located on either side of the web so that it is between the web and the source or

between the web and sensor device. Additionally, the filter may be located on both sides of the web.

In this process, the fiber orientation is preferably detected in a moving fibrous material web, particularly a paper web moving at normal speed in a papermaking machine.

Such an on-line measurement of the fiber orientation makes it possible to intervene in the manufacturing process for the fibrous material web immediately after detecting a deviation from the desired fiber orientation and thus to create a rapid control loop.

According to one aspect of the invention, there is provided a system for determining the orientation of fibers in a fibrous material web, the system including at least one source of electromagnetic radiation disposed on one side of the fibrous material web, at least one sensor for sensing the electromagnetic radiation emitted by the at least one source disposed on another side of the fibrous material web, and at least one optical device disposed between the at least one source and the at least one sensor, wherein the electromagnetic radiation travels through the at least one optical device and the fibrous material web such that the at least one optical device influences a propagation of the electromagnetic radiation as a function of its polarization properties. The fibrous material web may be a paper web. The at least one optical device may provide for the transmission of linearly polarized radiation. The at least one optical device may be a polarizing filter. The polarizing filter may be rotatably mounted about an axis. The axis may be approximately perpendicular to a running direction of the fibrous material web. The at least one optical device may include at least two optical devices, one optical device being disposed on one side of the fibrous material web and another optical device being disposed on another side of the fibrous material web. The at least one optical device may comprise at least two optical

devices, the at least two optical devices being disposed on one side of the fibrous material web. The at least two optical devices may be disposed between the at least one sensor and the fibrous material web. Each of the at least two optical devices may have a different orientation relative to a running direction of the fibrous material web.

5 The system may further comprise at least one optical device disposed between the at least one source and the fibrous material web. The at least two optical devices may be oriented symmetrically relative to the at least one optical device. Each of the at least two optical devices may be rotatably mounted about an axis. Each of the at least two optical device may be rotatable in opposite directions from one another.

10 The at least one optical device may comprise a single optical device disposed between the at least one sensor and the fibrous material web. The electromagnetic radiation emitted by the at least one source may be polarized before it passes through the fibrous material web. The single optical device may be rotatably mounted. The at least one optical device may comprise a single optical device disposed between the

15 at least one source and the fibrous material web. The electromagnetic radiation sensed by the at least one sensor may pass through the fibrous material web without being polarized. The single optical device may be rotatably mounted. The at least one sensor may comprise at least two sensors, each of the sensors being associated an optical device. The electromagnetic radiation may comprise one of a discrete and a

20 continuous wavelength spectrum. The electromagnetic radiation may comprise a discrete and a continuous wavelength spectrum. The electromagnetic radiation may comprise one of visible light and infrared radiation. The electromagnetic radiation may comprise visible light and infrared radiation. The at least one sensor may comprise one of a spectrometer and a photodiode. The at least one sensor may be

25 coupled to an analysis unit.

According to another aspect of the invention, there is provided a method for determining the orientation of fibers in a fibrous material web, the method including exposing a first side of the fibrous material web to electromagnetic radiation from at least one source, allowing the electromagnetic radiation to penetrate to a second side of the fibrous material web, influencing a propagation of the electromagnetic radiation as a function of its polarization properties with at least one optical device disposed between the at least one source and at least one sensor, and sensing the electromagnetic radiation on the second side with the at least one sensor. The fibrous material web may be a paper web. The at least optical device may comprise a polarizing filter disposed between the at least one source and the at least one sensor. The influencing may further comprise disposing a first optical device on the first side and a second optical device on the second side. The influencing may further comprise rotating the first optical device about an axis.

The second optical device may comprise a plurality optical devices. The plurality of optical devices may be arranged adjacent one another, each of the plurality being oriented to influence the propagation differently. The influencing may further comprise rotating the second optical device about an axis. The influencing may further comprise continuously moving the fibrous material web between the first optical device and the second optical device. The influencing may further comprise continuously moving the fibrous material web between the at least one source and the at least one sensor.

The method may further comprise analyzing a signal generated by the at least one sensor using an analyzer which is coupled to the at least one sensor. The method may further comprise analyzing the electromagnetic radiation after sensing. The analyzing may further comprise analyzing the electromagnetic radiation separately by wavelength. The exposing may comprise using a plurality of different sources.

The different sources may vary a wavelength of the electromagnetic radiation over time. The exposing may comprise varying a wavelength of the electromagnetic radiation over time. The method may further comprise analyzing a signal generated by the at least one sensor using an analyzer which is coupled to the at least one sensor to determine one of a difference signal, a summation signal and a ratio signal. The method may further comprise analyzing signals generated by a plurality of sensors using an analyzer which is coupled to the plurality and determining one of a difference signal, a summation signal and a ratio signal. The determining may comprise determining a difference signal, a summation signal and a ratio signal. The method may further comprise moving the fibrous material web between the at least one source and the at least one sensor. The moving may be at a constant speed. The fibrous material web may be a paper web.

The electromagnetic radiation may comprises one of a visible light and a infrared radiation. The influencing may comprise first polarizing the electromagnetic radiation on the first side using a first polarizing filter and second polarizing the electromagnetic radiation on the second side using a second polarizing filter. One of the first polarizing filter and the second polarizing filter may be rotatable. The first polarizing may comprise using a rotatable first polarizing filter. The second polarizing may comprise using a plurality of oriented second polarizing filters. Each of the plurality of second polarizing filters may be rotatable.

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention is further described in the detailed description which follows, in reference to the noted plurality of drawings by way of non-limiting examples of exemplary embodiments of the present invention, in which like reference

numerals represent similar parts throughout the several views of the drawings, and wherein:

Fig. 1a shows one embodiment of a system for determining fiber orientation which uses a single source side polarizing filter and a plurality of sensor side polarizing filters;

Fig. 1b shows a cross-section A-A view of the source side polarizing filter with polarizing oriented parallel to the web running direction;

Fig. 1c shows a cross-section B-B view of the sensor side polarizing filters with polarizing symmetrically oriented an angle to the web running direction;

Fig. 2a shows another embodiment of a system for determining fiber orientation which uses a single source side polarizing filter and a single sensor side polarizing filter;

Fig. 2b shows a cross-section A-A view of the source side polarizing filter with polarizing oriented parallel to the web running direction and rotatably mounted;

Fig. 2c shows a cross-section B-B view of the sensor side polarizing filter with polarizing oriented parallel to the web running direction and rotatably mounted;

Fig. 3a shows another embodiment of a system for determining fiber orientation which uses a single source side polarizing filter. This embodiment does not require a sensor side polarizing filter;

Fig. 3b shows a cross-section A-A view of the source side polarizing filter with polarizing oriented parallel to the web running direction and rotatably mounted;

Fig. 4a shows another embodiment of a system for determining fiber orientation which uses a single sensor side polarizing filter. This embodiment does not require a source side polarizing filter; and

Fig. 4b shows a cross-section A-A view of the sensor side polarizing filter with polarizing oriented parallel to the web running direction and rotatably mounted.

DETAILED DESCRIPTION OF THE PRESENT INVENTION

The particulars shown herein are by way of example and for purposes of illustrative discussion of the embodiments of the present invention only and are presented in the cause of providing what is believed to be the most useful and readily understood description of the principles and conceptual aspects of the present invention. In this regard, no attempt is made to show structural details of the present invention in more detail than is necessary for the fundamental understanding of the present invention, the description taken with the drawings making apparent to those skilled in the art how the several forms of the present invention may be embodied in practice.

Figs. 1a-c shows an embodiment of a system for determining fiber orientation in a moving paper web 10, whose travel direction is perpendicular to the plane of the drawing. That is, the web is seen from a direction which is transverse to the web running direction so that the web width is clearly seen.

The system according to the invention includes several optical devices, provided in the form of polarizing filters 14, 15. In order to illustrate the measurement principle explained below, the polarizing filters 14, 15 are each shown in figs. 1b and 1c, in top or cross-section view.

Arranged between a light source 12 emitting visible light and paper web 10 is a polarizing filter 14, whose direction of polarization is oriented parallel to the travel direction of the paper web 10, i.e., this filter is used to produce linearly polarized light whose direction of polarization is parallel to the web travel direction, as indicated by the hatching in filter 14 (see fig. 1b).

As an alternative to a visible light source 12, at least one radiation source may also be used, which emits radiation invisible to the human eye. This radiation may

be, for example, infrared radiation. Moreover, this aspect applies to all embodiments of the invention described herein.

The light source 12 is preferably designed to emit a wavelength spectrum that either contains multiple discrete wavelengths or is a continuous spectrum. In principle, a superposition of a discrete spectrum and a continuous spectrum is also possible.

On the opposite side of the paper web 10 is arranged two additional polarizing filters 15 which are located next to one another on a plane which runs perpendicular to the web travel direction. Associated with each of these filters 15, is a sensor 16 designed to detect the light which is emitted by the light source 12 and penetrates the paper web 10. Sensors 16 are designed as spectrometers which can measure the intensity of the incident radiation separately by wavelength. The signals provided by sensors 16 are delivered to a common analysis unit 18.

Fig. 1c shows the differences in hatching in the filters 15 arranged between the paper web 10 and the sensors 16. Filters 15 are symmetrically oriented differently such that their directions of polarization are each at an angle of approximately 45° to the travel direction of the paper web 10. Moreover, this angle is also approximately 45° to the direction of polarization of the filter 14 located on the other side of the fibrous material web 10. Filters 15 can also be rotated by other angles relative to the web travel direction, for example, by approximately 30° each, so that the directions of polarization of filters 15 form an angle of approximately 60° . Preferably, the polarizing filters 15 are each oriented symmetrically with respect to the web travel direction and the direction of polarization of the filter 14 associated with the light source 12, as shown in Figs. 1a-c.

It should be noted that the invention contemplates that more than two polarizing filters can be provided on the sensor side of the paper web 10 (the side

facing away from the light source 12). There would of course be a sensor for measuring the intensity of the radiation passing through that filter associated with each filter 15. For example, five (only two are shown) polarizing filters 15 can be arranged in a plane which is transverse to the web travel direction. These filters 15 are irradiated simultaneously by the light or radiation emitted by source 12 after the light or radiation passes through filter 14 and paper web 10. In this embodiment, the orientations of filters 15 relative to paper web 10 or the web travel direction, is chosen such that the directions of polarization form different angles with the web travel direction of, for example, $0^\circ \pm$ approximately 15° and \pm approximately 30° .

In the variants described above in connection with Figs. 1a-c, the orientations of polarizing filters 14, 15 are retained (not changed) during measurement. Moreover, the signals supplied by sensors 16 associated with individual filters 15 are placed in relation to one another in order to detect the fiber orientation. The invention also contemplates the use of even more than five filters 15 because the greater the number of polarizing filters 15 used on the sensor side of the web, the more definitive or precise are the measurement results that can be obtained.

By utilizing analysis unit 18, a difference signal, a summation signal, and a ratio signal are formed, generated or produced from the signals supplied by the two or more sensors 16. In this context, the difference signal represents a measure of the fiber orientation relative to the known orientation of polarizing filter 14 associated with light source 12 and thus relative to the travel direction of the paper web 10. While the ratio of the two signals to one another is a measure of the uniform distribution of the orientations of the individual fibers in the paper web 10. The summation signal can be used to normalize the measurements.

In principle, the three aforementioned signals, namely the difference signal, the summation signal, and the ratio signal, suffice to identify what is known as a breaking

load ellipse, which serves to identify the fiber orientation and/or distribution. Such breaking load ellipses are described, for example, in the reports of Sulzer-Escher Wyss GmbH, Ravensburg, No. 6/1/89, Münch et al., and No. 4/6/84, Weissshuhn, as well as in an article by Weissshuhn et al. entitled "Einfluß des Stoffauflaufs auf die Blatteigenschaften und deren Konstanz" ["Influence of the Flow of Material on the Sheet Characteristics and their Consistency"] in a special edition of the journal "Das Papier," No. 10, Vol. 40.

In the embodiment in Figs. 2a-c, only one polarizing filter 15 is located on the sensor side of paper web 10. Associated with filter 15 is a sensor 16 connected to analysis unit 18. For the purpose of identifying several direction-dependent signals which, in the aforementioned exemplary embodiment of Figs. 1a-c, are obtained by providing multiple polarizing filters with different orientations, polarizing filter 15 in Figs. 2a, 2c is mounted such that it can rotate about an axis running perpendicular to paper web 10. Alternatively, filter 14 which is arranged on the source side of paper web 10 can also be rotated. Moreover, both filter 14 and filter 15 can be rotatably mounted. During the measurement in these embodiments, the measured intensity of the light radiation is identified for each angle of rotation of the relevant filter 15 or 14.

Figs. 3a-b show another exemplary embodiment of the invention in which only one optical device in the form of a polarizing filter 14 is provided. Filter 14 is located between light source 12 and paper web 10. The direction-dependent intensity values for this embodiment are obtained sequentially by rotation of filter 14 and by utilizing sensor 16. The fiber orientation is subsequently identified from these values.

In another exemplary embodiment shown in Figs. 4a-b, again only one polarizing filter 15 is provided. Filter 15 is located between paper web 10 and sensor 16. Moreover, filter 15 is rotatably mounted in order to obtain a multiplicity of direction-dependent measured values.

In similar fashion to the exemplary embodiment described with respect to Figs. 1a-c, it is also possible to utilize measured values obtained in each case with two different orientations to form a difference signal, a ratio signal, and a summation signal in the variants using rotating polarizing filters 14 or 15 as per Figs. 2a-c, 3a-b and 4a-b.

In all embodiments of the invention explained above, the measurement is preferably performed simultaneously with several different wavelengths, working with a light or radiation source 12 emitting a wavelength spectrum and utilizing sensors 16 designed as spectrometers.

Moreover, the signals supplied by sensors 16 are preferably subjected to a data reduction process in analysis unit 18, preferably using a PLS process (Partial Least Squares process).

Furthermore, additional optical devices could be provided in each case, which serve such purposes as performing simultaneous measurements with reference radiation.

It is noted that the foregoing examples have been provided merely for the purpose of explanation and are in no way to be construed as limiting of the present invention. While the present invention has been described with reference to exemplary embodiments, it is understood that the words which have been used herein are words of description and illustration, rather than words of limitation. Changes may be made, within the purview of the appended claims, as presently stated and as amended, without departing from the scope and spirit of the present invention in its aspects. Although the present invention has been described herein with reference to particular means, materials and embodiments, the present invention is not intended to be limited to the particulars disclosed herein; rather, the present invention extends

P19026.S03

to all functionally equivalent structures, methods and uses, such as are within the scope of the appended claims.

LIST OF REFERENCE CHARACTERS

10 fibrous material web, paper web

12 radiation source, light source

14, 15 optical devices, polarizing filters

* 5 16 sensors

• 18 analysis unit

WHAT IS CLAIMED

1. A system for determining the orientation of fibers in a fibrous material web,
the system comprising:

at least one source of electromagnetic radiation disposed on one side of the
5 fibrous material web;

at least one sensor for sensing the electromagnetic radiation emitted by the at
least one source disposed on another side of the fibrous material web; and

at least one optical device disposed between the at least one source and the at
least one sensor,

10 wherein the electromagnetic radiation travels through the at least one optical
device and the fibrous material web such that the at least one optical device influences
a propagation of the electromagnetic radiation as a function of its polarization
properties.

2. The system of claim 1, wherein the fibrous material web is a paper web.

15 3. The system of claim 1, wherein the at least one optical device provides for
the transmission of linearly polarized radiation.

4. The system of claim 1, wherein the at least one optical device is a polarizing
filter.

20 5. The system of claim 3, wherein the polarizing filter is rotatably mounted
about an axis.

6. The system of claim 5, wherein the axis is approximately perpendicular to a running direction of the fibrous material web.

7. The system of claim 1, wherein the at least one optical device comprises at least two optical devices, one optical device being disposed on one side of the fibrous material web and another optical device being disposed on another side of the fibrous material web.

8. The system of claim 1, wherein the at least one optical device comprises at least two optical devices, the at least two optical devices being disposed on one side of the fibrous material web.

9. The system of claim 8, wherein the at least two optical devices are disposed between the at least one sensor and the fibrous material web.

10. The system of claim 9, wherein each of the at least two optical devices have a different orientation relative to a running direction of the fibrous material web.

11. The system of claim 8, further comprising at least one optical device disposed between the at least one source and the fibrous material web.

12. The system of claim 11, wherein the at least two optical devices are oriented symmetrically relative to the at least one optical device.

13. The system of claim 8, wherein each of the at least two optical devices is rotatably mounted about an axis.

14. The system of claim 13, wherein each of the at least two optical devices is rotatable in opposite directions from one another.

5 15. The system of claim 1, wherein the at least one optical device comprises a single optical device disposed between the at least one sensor and the fibrous material web.

16. The system of claim 15, wherein the electromagnetic radiation emitted by the at least one source is polarized before it passes through the fibrous material web.

17. The system of claim 15, wherein the single optical device is rotatably mounted.

10 18. The system of claim 1, wherein the at least one optical device comprises a single optical device disposed between the at least one source and the fibrous material web.

15 19. The system of claim 18, wherein the electromagnetic radiation sensed by the at least one sensor passes through the fibrous material web without being polarized.

20. The system of claim 18, wherein the single optical device is rotatably mounted.

21. The system of claim 9, wherein the at least one sensor comprises at least two sensors, each of the sensors being associated with an optical device.

22. The system of claim 1, wherein the electromagnetic radiation comprises one of a discrete and a continuous wavelength spectrum.

23. The system of claim 1, wherein the electromagnetic radiation comprises a discrete and a continuous wavelength spectrum.

5 24. The system of claim 1, wherein the electromagnetic radiation comprises one of visible light and infrared radiation.

25. The system of claim 1, wherein the electromagnetic radiation comprises visible light and infrared radiation.

10 26. The system of claim 1, wherein the at least one sensor comprises one of a spectrometer and a photodiode.

27. The system of claim 1, wherein the at least one sensor is coupled to an analysis unit.

28. A method for determining the orientation of fibers in a fibrous material web, the method comprising:

15 exposing a first side of the fibrous material web to electromagnetic radiation from at least one source;

 allowing the electromagnetic radiation to penetrate to a second side of the fibrous material web;

influencing a propagation of the electromagnetic radiation as a function of its polarization properties with at least one optical device disposed between the at least one source and at least one sensor; and

sensing the electromagnetic radiation on the second side with the at least one sensor.

29. The method of claim 28, wherein the fibrous material web is a paper web.

30. The method of claim 28, wherein the at least optical device comprises a polarizing filter disposed between the at least one source and the at least one sensor.

31. The method of claim 28, wherein the influencing further comprises disposing a first optical device on the first side and a second optical device on the second side.

32. The method of claim 31, wherein the influencing further comprises rotating the first optical device about an axis.

33. The method of claim 32, wherein the second optical device comprises a plurality of optical devices.

34. The method of claim 33, wherein the plurality of optical devices are arranged adjacent one another, each of the plurality being oriented to influence the propagation differently.

35. The method of claim 31, wherein the influencing further comprises rotating the second optical device about an axis.

36. The method of claim 31, wherein the influencing further comprises continuously moving the fibrous material web between the first optical device and the second optical device.

37. The method of claim 28, wherein the influencing further comprises continuously moving the fibrous material web between the at least one source and the at least one sensor.

38. The method of claim 28, further comprising analyzing a signal generated by the at least one sensor using an analyzer which is coupled to the at least one sensor.

39. The method of claim 28, further comprising analyzing the electromagnetic radiation after sensing.

40. The method of claim 39, wherein the analyzing further comprises analyzing the electromagnetic radiation separately by wavelength.

41. The method of claim 28, wherein the exposing comprises using a plurality of different sources.

42. The method of claim 41, wherein the different sources vary a wavelength of the electromagnetic radiation over time.

43. The method of claim 28, wherein the exposing comprises varying a wavelength of the electromagnetic radiation over time.

44. The method of claim 28, further comprising analyzing a signal generated by the at least one sensor using an analyzer which is coupled to the at least one sensor to determine one of a difference signal, a summation signal and a ratio signal.

45. The method of claim 28, further comprising analyzing signals generated by a plurality of sensors using an analyzer which is coupled to the plurality and determining one of a difference signal, a summation signal and a ratio signal.

46. The method of claim 45, wherein the determining comprises determining a difference signal, a summation signal and a ratio signal.

47. The method of claim 28, further comprising moving the fibrous material web between the at least one source and the at least one sensor.

48. The method of claim 47, wherein the moving is at a constant speed.

49. The method of claim 48, wherein the fibrous material web is a paper web.

50. The method of claim 28, wherein the electromagnetic radiation comprises one of a visible light and a infrared radiation.

51. The method of claim 50, wherein the influencing comprises first polarizing the electromagnetic radiation on the first side using a first polarizing filter and then polarizing the electromagnetic radiation on the second side using a second polarizing filter.

5 52. The method of claim 51, wherein one of the first polarizing filter and the second polarizing filter is rotatable.

53. The method of claim 51, wherein the polarizing on the first side comprises using a rotatable first polarizing filter.

10 54. The method of claim 51, wherein the polarizing on the second side comprises using a plurality of oriented second polarizing filters.

55. The method of claim 54, wherein each of the plurality of second polarizing filters are rotatable.

ABSTRACT OF THE DISCLOSURE

A system and method for determining the orientation of fibers in a fibrous material web. The system includes at least one source of electromagnetic radiation disposed on one side of the fibrous material web, at least one sensor for sensing the electromagnetic radiation emitted by the at least one source disposed on another side of the fibrous material web, and at least one optical device disposed between the at least one source and the at least one sensor, wherein the electromagnetic radiation travels through the at least one optical device and the fibrous material web such that the at least one optical device influences a propagation of the electromagnetic radiation as a function of its polarization properties. The method includes exposing a first side of the fibrous material web to electromagnetic radiation from at least one source, allowing the electromagnetic radiation to penetrate to a second side of the fibrous material web, influencing a propagation of the electromagnetic radiation as a function of its polarization properties with at least one optical device disposed between the at least one source and at least one sensor, and sensing the electromagnetic radiation on the second side with the at least one sensor.

Fig. 1a

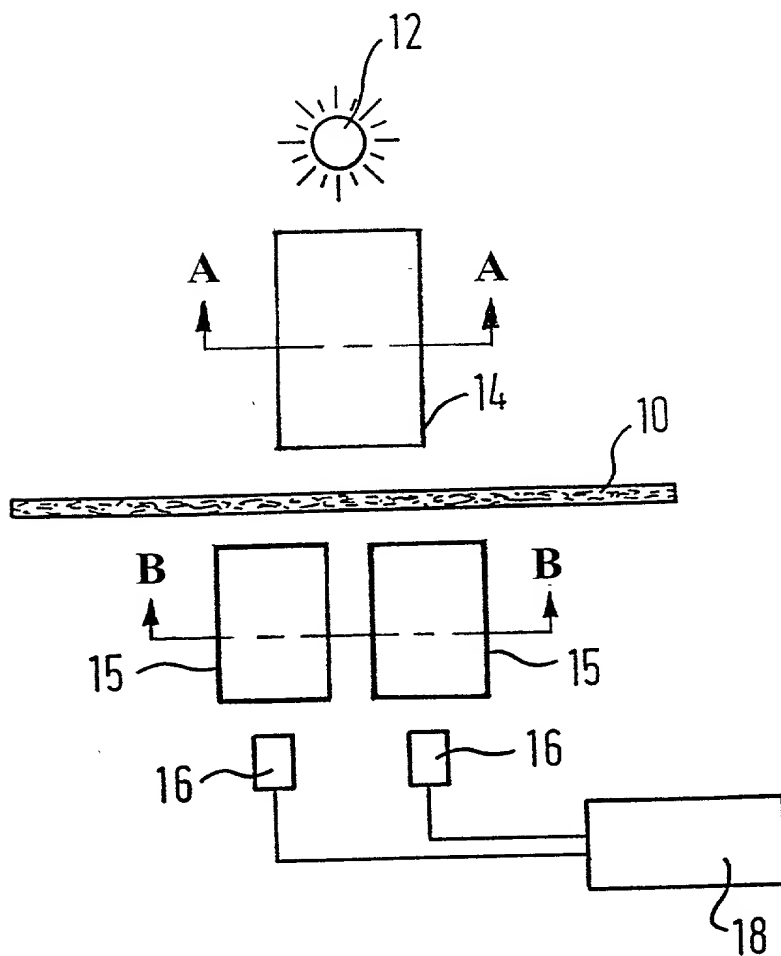


Fig. 1b




Fig. 1c

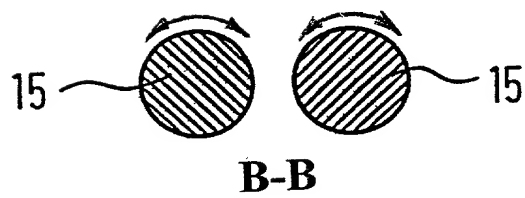


Fig. 2a

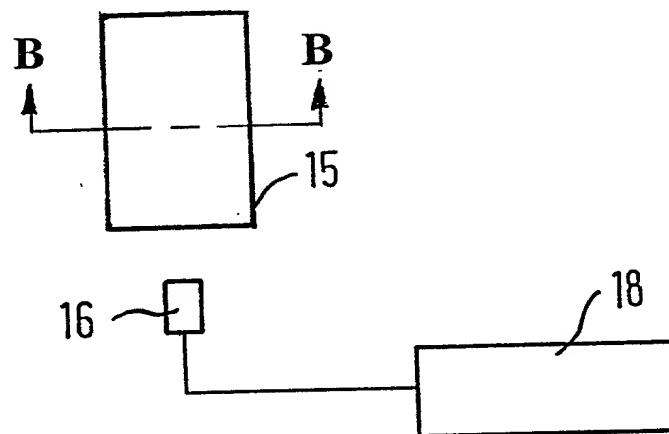
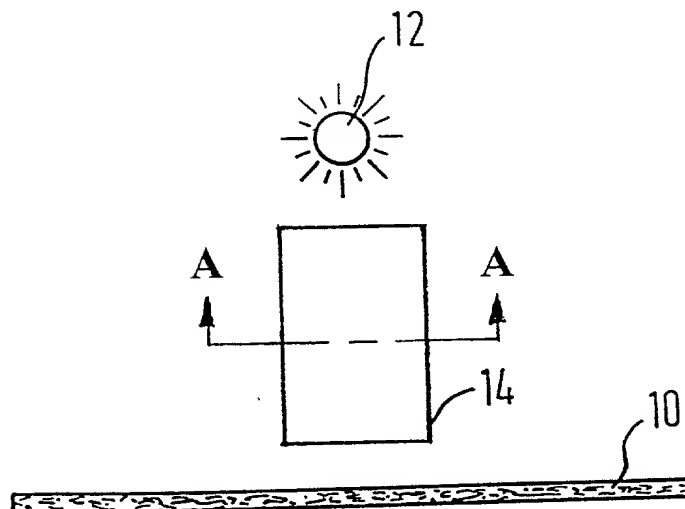


Fig. 2b




Fig. 2c




Fig. 3a

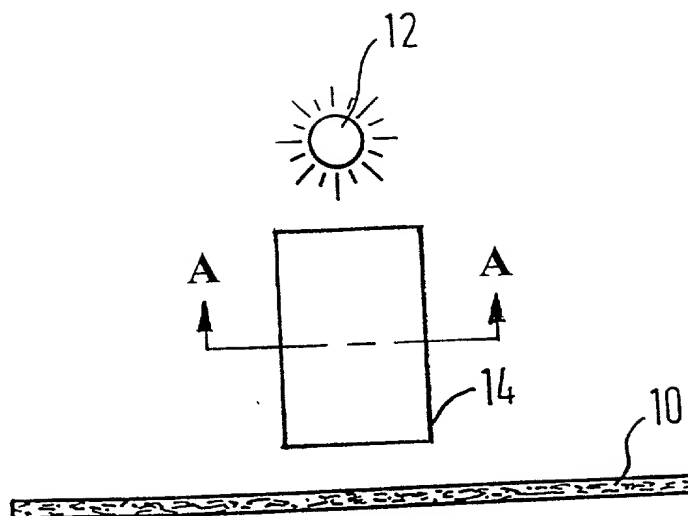


Fig. 3b




Fig. 4a



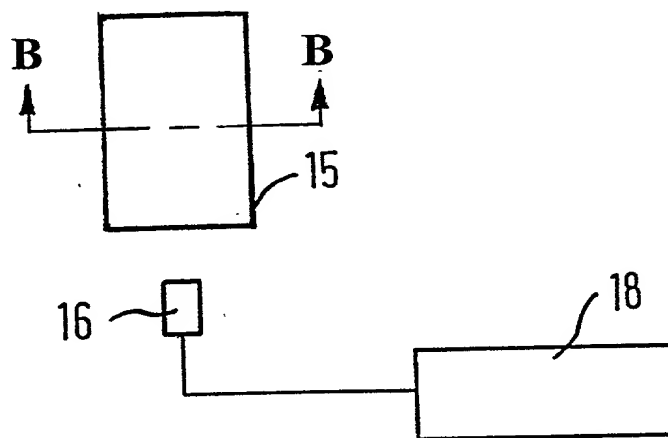


Fig. 4b

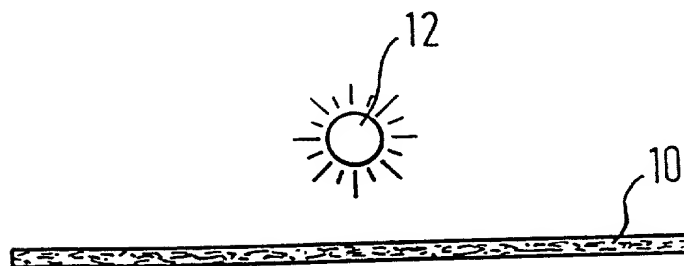

Declaration and Power of Attorney For Utility or Design Patent Application

Erklärung für Patentanmeldungen zur Gebrauchseignung und Entwicklung
mit Vollmacht

German Language Declaration

Als nachstehend benannter Erfinder erkläre ich hiermit an Eides
Statt:

daß mein Wohnsitz, meine Postanschrift und meine Staats-
angehörigkeit den im nachstehenden nach meinem Namen
aufgeführten Angaben entsprechen, daß ich nach bestem Wissen der
ursprüngliche, erste und alleinige Erfinder (falls nachstehend nur ein
Name angegeben ist) oder ein ursprünglicher, erster und Miterfinder
(falls nachstehend mehrere Namen aufgeführt sind) des Gegenstandes
bin, für den dieser Antrag gestellt wird und für den ein Patent für die
Erfindung mit folgendem Titel beantragt wird:

VORRICHTUNG UND VERFAHREN ZUM BESTIMMEN DER
FASERORIENTIERUNG IN FASERSTOFFBAHNEN

deren Beschreibung hier beigelegt ist, es sei denn (in diesem Falle
Zutreffendes bitte ankreuzen), diese Erfindung

☐ wurde angemeldet am _____
unter der US-Anmeldenummer _____
und wurde am _____ abgeändert (falls zutreffend) oder

unter der PCT internationalen Anmeldungsnummer _____
und wurde am _____ abgeändert (falls zutreffend).

Ich bestätige hiermit, daß ich den Inhalt der oben angegebene Paten-
tanmeldung, einschließlich der Ansprüche, die eventuell durch einen
oben erwähnten Zusatzantrag abgeändert wurde, durchgesehen und
verstanden habe.

Ich erkenne meine Pflicht zur Offenbarung jeglicher Informationen
an, die zur Prüfung der Patentfähigkeit in Einklang mit Titel 37, Code
of Federal Regulations, § 1.56 von Belang sind.

Ich beanspruche hiermit ausländische Prioritätsvorteile gemäß Title
35, US-Code, § 119 (a)-(d), bzw. § 365(b) aller unten aufgeführten
Auslandsanmeldungen für Patente oder Erfinderurkunden, oder §
365(a) aller PCT internationalen Anmeldungen, welche wenigstens
ein Land ausser den Vereinigten Staaten von Amerika benennen, und
habe nachstehend durch ankreuzen sämtliche Auslandsanmeldungen
für Patente bzw. Erfinderurkunden oder PCT internationale
Anmeldungen angegeben, deren Anmeldetag dem der Anmeldung,
für welche Priorität beansprucht wird, vorangeht.

Prior Foreign Applications

Frühere ausländische Anmeldungen

<u>199 13 924.5</u>	<u>GERMANY</u>	<u>26/MARCH/1999</u>
(Number)	(Country)	(Day/Month/Year Filed)
(Nummer)	(Land)	(Tag/Monat/Jahr der Anmeldung)
_____	_____	_____
(Number)	(Country)	(Day/Month/Year Filed)
(Nummer)	(Land)	(Tag/Monat/Jahr der Anmeldung)

☐ Zusätzliche einstweilige Anwendungsnummern sind im
Prioritätsanhang aufgeführt.

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated
below next to my name.

I believe I am the original, first and sole inventor (if only one name
is listed below) or an original, first and joint inventor (if plural
names are listed below) of the subject matter which is claimed and
for which a patent is sought on the invention entitled

SYSTEM AND METHOD FOR DETERMINING FIBER
ORIENTATION IN FIBROUS MATERIAL WEBS

the specification of which is attached hereto unless the following
box is checked:

☐ was filed on _____ as
United States Application Number _____
and was amended on _____ (if applicable) or,

PCT International Application Number _____
and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of
the above identified specification, including the claims, as
amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material
to patentability as defined in Title 37, Code of Federal
Regulations, § 1.56.

I hereby claim foreign priority under Title 35, United States Code
§ 119 (a-d) or § 365(b) of any foreign application(s) for patent or
inventor's certificate, or § 365(a) of any PCT international
application which designated at least one country other than the
United States, listed below. I have also identified below, by
checking the "No" box, any foreign application for patent or
inventor's certificate, or of any PCT international application
having a filing date before that of the application on which priority
is claimed:

Priority Claimed Prioritätsanspruch

<input checked="" type="checkbox"/>	<input type="checkbox"/>
Yes	No
Ja	Nein
<input type="checkbox"/>	<input type="checkbox"/>
Yes	No
Ja	Nein

☐ Additional foreign application numbers are listed
on a supplemental priority sheet attached hereto.

German Language Utility or Design Patent Application Declaration

Ich beanspruche hiermit Prioritätsvorteile unter Title 35, US-Code, § 119(e) aller US-Hilfsanmeldungen wie unten aufgezählt.

I hereby claim the benefit under Title 35, United States Code §119(e) of any United States provisional application(s) listed below.

(Application Number)
(Aktenzeichen)

(Day/Month/Year Filed)
(Tag/Monat/Jahr der Anmeldung)

(Application Number)
(Aktenzeichen)

(Day/Month/Year Filed)
(Tag/Monat/Jahr der Anmeldung)

(Application Number)
(Aktenzeichen)

(Day/Month/Year Filed)
(Tag/Monat/Jahr der Anmeldung)

☐ Zusätzliche einstweilige Anmeldeungsnummern sind im ergänzenden Prioritätsanhang aufgeführt.

☐ Additional provisional application numbers are listed on a supplemental priority sheet attached hereto.

Ich beanspruche hiermit die mir unter Title 35, US-Code, § 120 zustehenden Vorteile aller unten aufgeführten US-Patentanmeldungen bzw. § 365(c) aller PCT internationalen Anmeldungen, welche die Vereinigten Staaten von Amerika benennen, und erkenne, insofern der Gegenstand eines jeden früheren Anspruchs dieser Patentanmeldung nicht in einer US-Patentanmeldung, bzw. PCT internationalen Anmeldung in in einer gemäß dem ersten Absatz von Title 35, US-Code, § 112 vorgeschriebenen Art und Weise offenbart wurde, meine Pflicht zur Offenbarung jeglicher Informationen an, die zur Prüfung der Patentfähigkeit in Einklang mit Title 37, Code of Federal Regulations, § 1.56 von Belang sind und die im Zeitraum zwischen dem Anmeldetag der früheren Patentanmeldung und dem nationalen oder im Rahmen des Vertrags über die Zusammenarbeit auf dem Gebiet des Patentwesens (PCAT) gültigen internationalen Anmeldetags bekannt geworden sind.

I hereby claim the benefit under Title 35, United States Code §120 of any United States application(s), or §365(c) of any PCT international application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of Title 35, United States Code §112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

(Application No.)
(Aktenzeichen)

(Day/Month/Year Filed)
(Tag/Monat/Jahr eingereicht)

(Status)
(patentiert, schwebend, aufgegeben)
(patented, pending, abandoned)

(Application No.)
(Aktenzeichen)

(Day/Month/Year Filed)
(Tag/Monat/Jahr eingereicht)

(Status)
(patentiert, schwebend, aufgegeben)
(patented, pending, abandoned)

☐ Zusätzliche USA oder internationale Anmeldeungsnummern sind im ergänzenden Prioritätsanhang aufgeführt.

☐ Additional U.S. or international application numbers are listed on a supplemental priority sheet attached hereto.

Ich erkläre hiermit, daß alle in der vorliegenden Erklärung von mir gemachte Angaben nach bestem Wissen und Gewissen der Wahrheit entsprechen, und ferner daß ich diese eidesstattliche Erklärung in Kenntnis dessen ablege, daß wissentlich und vorsätzlich falsche Angaben oder dergleichen gemäß § 1001, Title 18 des US-Code strafbar sind und mit Geldstrafe und/oder Gefängnis bestraft werden können und daß derartige wissentlich und vorsätzlich falsche Angaben die Rechtswirksamkeit der vorliegenden Patentanmeldung oder eines aufgrund deren erteilten Patentess gefährden können.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Hiermit bevollmächtigt der Unterzeichnete den hierin genannten entweder USA-Anwalt oder Stellvertreter, in der Abwesenheit einer direkten Verständigung zwischen den USA-Anwalt oder Stellvertreter und dem Unterzeichneten Anweisungen, die der der Anmeldung betreffend dem Patent und Warenzeichen Amt zugestellt werden, von entweder seinem ausländischen Patentvertreter oder Stellvertreter der Gesellschaft anzunehmen und auszuführen. Sollte sich das Personal ändern, von dem Anweisungen angenommen werden mögen, dann wird der hierin genannte USA-Anwalt oder Stellvertreter entsprechend von dem Unterzeichneten benachrichtigt.

The undersigned hereby authorizes the U.S. attorney or agent named herein to accept and follow instructions from either his foreign patent agent or corporate representative, if any, as to any action to be taken in the Patent and Trademark Office regarding this application without direct communication between the U.S. attorney or agent and the undersigned. In the event of a change in the persons from whom instructions may be taken, the U.S. attorney or agent named herein will be so notified by the undersigned.

German Language Utility or Design Patent Application Declaration

VERTRETUNGSVOLLMACHT: Als benannter Erfinder beauftrage ich hiermit den (die) nachstehend aufgeführten Patentanwalt (Patentanwälte) und/oder Vertreter mit der Verfolgung der vorliegenden Patentanmeldung sowie mit der Abwicklung aller damit verbundenen Angelegenheiten vor dem US-Patent- und Markenamt: *(Name(n) und Registrationsnummer(n) auflisten)*

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith: *(list name and registration number)*

KUNDENNUMMER 7055

CUSTOMER NUMBER 7055

Die ernannten Patenanwälte sind zur Zeit:

The appointed attorneys presently include:

Neil F. Greenblum	Reg. No. 28,394
Bruce H. Bernstein	Reg. No. 29,027
James L. Rowland	Reg. No. 32,674
Arnold Turk	Reg. No. 33,094

Address: **Greenblum & Bernstein, P.L.C.**
1941 Roland Clarke Place
Reston, VA 20191

Telefongespräche bitte richten an:

Direct Telephone Calls to:

Greenblum & Bernstein, P.L.C.
(703) 716-1191

Vor- und Nachname des einzigen oder ersten Erfinders:
Rudolf MÜNCH

Full name of sole or first inventor
Rudolf MÜNCH

Unterschrift des Erfinders Datum

Inventor's signature Date

Wohnsitz
KÖNIGSBRONN, DEUTSCHLAND

Residence
KÖNIGSBRONN, GERMANY

Staatsangehörigkeit
DEUTSCHLAND

Citizenship
GERMANY

Postanschrift
Essinger Strasse 7, D-89551 Königsbronn, DEUTSCHLAND

Post Office Address
Essinger Strasse 7, D-89551 Königsbronn, GERMANY

Vor- und Nachname des zweiten Miterfinders (falls zutreffend)

Full name of second joint inventor, if any

Unterschrift des zweiten Erfinders Datum

Second Inventor's Signature Date

Wohnsitz

Residence

Staatsangehörigkeit

Citizenship

Postanschrift

Post Office Address

(Bitte entsprechende Informationen und Unterschriften im Falle von dritten und weiteren Miterfindern angeben).

(Supply similar information and signature for third and subsequent joint inventors).